




# Crocodile HS Grout

## High Early Strength Hydraulic Grout

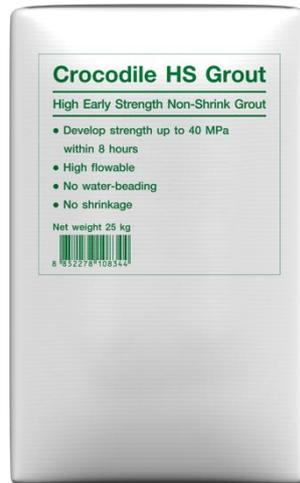

### High Early Strength Hydraulic Grout

Crocodile HS Grout can reach strength up to 40 MPa within 8 hours, and more than 60 MPa in 28 days. It has high flowable and self-compacting can be filled all void without vibrating. No water-bleeding, no shrinkage. It is designed for grouting of heavy-duty equipment, Crane rail grooves in ports and docks, Rail clips grouting, railway sleeper, Base plate, Bolt fixing, etc.

### Product Features

- Develop strength up to 40 MPa within 8 hours.
- High flowable, do not need vibrate.
- No water-bleeding
- No shrinkage-no cracking

### Application

- Grouting rail (Plinth) of high-speed train
- Grouting heavy-duty machine
- Grouting precast concrete column
- Base plate and bolt anchorage
- Bridge support
- Voids

**Standard :** GB/T50448, TB/T2331, TB/T3320

**Color :** Gray



### **Application Instruction**

#### **Substrate Preparation**

- Ensure, the substrate must be strong and firm.
- Substrate must be cleaned by water. Free from oil, grease or any loosely adherent material.
- Wet the substrate several hours prior to grouting, the area of cleaned foundation must be flooded with fresh water. Immediately before grouting takes place, any free water should be removed.
- Base plate and bolt must be clean and free from oil, grease scale or paint. Air pressure relief holes should be provided to allow venting of any isolated high spots.
- The formwork should be constructed to be leakproof. This can be achieved between joints by using sealant.

#### **Mixing Ratio**

Water : Crocodile HS Grout = 13%

Water 3.25 Liters : Crocodile HS Grout 1 bag (25 kgs)

#### **Mixing**

- Use clean water or drinking water with the amount as the above recommendation.
- Prepare 90% water of total required quantity into mixer. Turn on the mixer and slowly pour Crocodile HS Grout. Stir for 2 minutes.
- Add 10% of retention water and mix for 30 seconds. It is recommended to use a mechanical stirrer with speeds between 500-1,000 rpm.
- Coarse aggregate (if needed) should be cleaned, before adding to mix.
- Do not add other additives.
- Should be used within 30 minutes. Do not add more water to the mixed material paste.

#### **Application Method**

- The area of the cleaned foundation must be wet with water until saturated.
- Using the mixed Crocodile HS Grout within 30 minutes to gain full benefit of the expansion process. Maximum thickness must be not over 50 millimeter in a single layer. Coarse aggregate (size 3/8 inch or 9-10 millimeter) can be added up to 30% by weight (7-8 kg aggregate per 25 kg grout) when formwork depth more than 50 millimeter.
- Wet or moist the casting places after set for 3-7 days.
- Protect the area from vibration, heat, and temperature shock during the first 24 hours.

#### **Estimate Coverage**

- Crocodile HS grout 1 bag (25 kg) / 0.014 cubic meter
- Crocodile HS grout 72 bag (25 kg) / 1.00 cubic meter

#### **Tool Cleaning**

- Cleaning tool by water



### Technical Data

Test Method	Standard Value	Result
<b>Open Time</b>		30 minutes
<b>Flowability</b>		
Initial	$\geq 320$ mm	$\geq 350$ mm
30 minutes	$\geq 240$ mm	$\geq 300$ mm
<b>Setting Time</b>		
Initial	$\geq 38$ minutes	40 minutes
Final	$\leq 180$ minutes	60 minutes
<b>Compressive Strength</b>		
8 hours	$\geq 20$ MPa	$\geq 40$ MPa
1 day	$\geq 40$ MPa	$\geq 60$ MPa
28 days	$\geq 50$ MPa	$\geq 70$ MPa
56 days	$\geq 50$ MPa	$\geq 70$ MPa
<b>Flexural Strength</b>		
1 day	$\geq 10$ MPa	$\geq 11$ MPa
28 days	$\geq 10$ MPa	$\geq 11$ MPa
<b>Expansive Rate</b>		
28 days	0.02-0.1 %	0.02-0.03 %
<b>Modulus of Elasticity</b>		
28 days	$\geq 30$ GPa	$\geq 30$ GPa
<b>Bleeding rate</b>	0	0

\* According to TB/T2331 and TB/T3320 standard test method.



### **Recommendations**

- High environmental temperature might shorten bucket life and open time of products. Using cool water to prevent this case.
- Do not add more water. Excess water will affect the mechanical properties such as the decreasing of compressive strength and flexural strength. But the shrinkage will increase.
- Ensure the substrate must be strong and firm.
- Minimum thickness of Crocodile HS Grout must be more than 10 millimeters per layer.
- Wet curing Immediately after completion of work. Allow curing 3-7 days.
- Crocodile HS Grout is a moisture sensitive product. Moisture will degrade the product's shelf life.

### **Caution**

- Recommend using rubber gloves, dust masks, eye glass and personal safety equipment.
- Apply with good ventilation. Do not inhale product.
- In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice.
- Keep away from children.

### **Storage**

- Keep in a cool, dry area, storage temperature should be 0 - 35°C.
- Place with prevent direct sunlight.
- Shelf life for 6 months since manufactured date.

### **Packing**

Net weight : 25 kg

The information provided is given in good faith, based on current knowledge and Jorakay Corporation's experience with the products when they are properly stored, handled and applied in normal situations and in accordance with the recommendations of Jorakay Corporation. This is useful for information and consulting, but is not legally binding. In particular, it does not exempt the user from testing and verifying the suitability of the product for the desired application and purpose. Jorakay Corporation reserves the right to modifications that improve the product or its application. This version invalidates previous ones.