



MIPOLAM® TROPLAN PLUS 

gerflor.com
gerflor.asia



NEW

Gerflor®
theflooringgroup

MIPOLAM® TROPLAN PLUS




EVERCARE™

34-43



MIPOLAM® TROPLAN PLUS

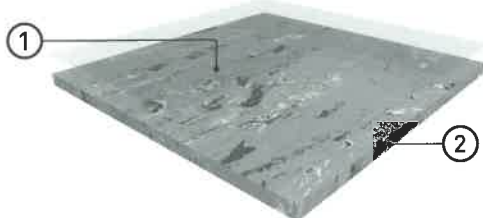

① EVERCARE™ surface treatment

② Compacted calendered homogeneous floorcovering

- ☐ High performance flexible homogeneous multipurpose flooring
- ☐ Available in sheet
- ☐ Directional design
- ☐ EVERCARE™ surface treatment: for ease of maintenance
- ☐ Densely compacted surface for improved wear maintenance
- ☐ Anti-bacterial and fungicidal
- ☐ Antistatic



Compacted sheet, without foam backing


evercare™ SURFACE TREATMENT

EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR®

THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT



BY GERFLOR : Treatment durability



Gerflor®: Even thickness



100% non-porous surface
Water-repellent effect

Other non-treated floor covering



Missing treatment and
uneven thickness



Non-treated product

SIMPLE & EASY STAIN REMOVAL





1009 Light Grey



1010 Grey



1002 Beige



1059 Blue Grey



1003 Light Ocre



1040 Dark Grey



1035 Ocre



1032 Yellow



1055 Apricot



1004 Earth



1007 Green



1033 Brown



1037 Medium Green



1006 Blue



1057 Dark Green



1056 Dark Blue



1036 Medium Blue



1060 Anthracite

MIPOLAM® TROPLAN PLUS

DESCRIPTION

Total thickness	ISO 24346 [EN 428]	mm	2
Weight	ISO 23997 [EN 430]	g/m ²	3100
Width / Length of sheet	ISO 24341 [EN 426]	cm / tm	200 / 20

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581 [EN 649]
European classification	ISO 10874 [EN 685]	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	class	R9

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	II
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0.4
Residual indentation	ISO 24343-1 [EN 433]	mm	≈0.03
Castor chair test	ISO 4918 [EN 425]	-	OK
Thermal conductivity	ISO 10456 [EN 12524]	W/(m.K)	≈0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 [EN 423]	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	EVERCARE™
Color number	-	-	18

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 10
Certification	-	-	Floorscore®

CE MARKING

CE	EN 14041	-	
----	----------	---	--

MIPOLAM® TROPLAN PLUS is a flexible homogeneous calendered compacted floorcovering in sheet, with directional design color dyed as a raw mixture to ensure color throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance.

It benefits from Evercare™ which has the highest chemicals resistance on the market for durable appearance and cleanliness of the product. It is probably the best treatment against chemicals ever on homogeneous flooring. No wax for life!

MIPOLAM® TROPLAN PLUS features bacteriostatic and fungistatic treatment. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for heavy traffic areas.

Gerflor. Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

MIPOLAM® TROPLAN PLUS, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100% REACH compliant
FREE of formaldehyde
FREE of heavy metals
FREE of solvent



RECYCLED CONTENT
25% average
recycled content
100% REACH compliant
recycled content



RECYCLABILITY
100% recyclable
product



INDOOR AIR QUALITY
TVOC emissions between
10 and 100 times better than
norms requirements
Floorscore certified
No formaldehyde emission



INSTALLATION
Innovative adhesive
free installation systems



WELLNESS
Health: Antibacterial activity
(inhibits growth > 99%)

บริษัท ไทยวัฒนาสามัคคี จำกัด
Building Materials Store, Bangkok
02 374 2872, 02 377 1532, 02 377 3304
Showroom : Monday - Saturday 8am - 5pm

www.twsplus.com
E-mail: sale.twsplus@gmail.com
Line Official : @twsplus



Gerflor®
theflooringgroup

GERFLOR ASIA Tel : + 86-21-63578818

Performances and benefits



Excellent abrasion resistance



Matt finish surface: enhanced design & colour



Available in 2 m sheet



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas



Flexible flooring, easy to install & weld



Directional design available in 18 references

FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION 100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

Health

- Antibacterial activity (inhibits growth > 99 %)



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements (TVOC <10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



RECYCLED CONTENT

- 100 % REACH compliant recycled content

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable, the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

 Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.