

MIPOLAM® AMBIANCE ULTRA™

CLASSIC & TRENDY

gerflor.com
gerflor.asia

NEW



Gerflor®
theflooringgroup

Classic



2071 Imperial Red



2078 Corn



2073 Vanilla



2072 Terracotta



2074 Pumkin



2079 Capuccino



2080 Espresso



2059 Camel




2060 Sahara



Classic



2055 Opale

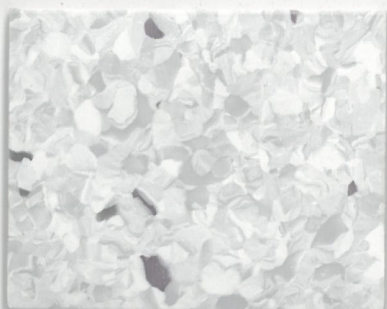


2054 Cloud



2053 Mouse



2056 Deer

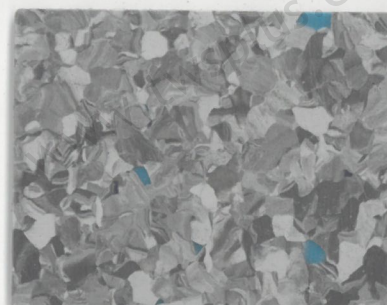


2051 Charcoal



2052 Ash



2057 Coffee

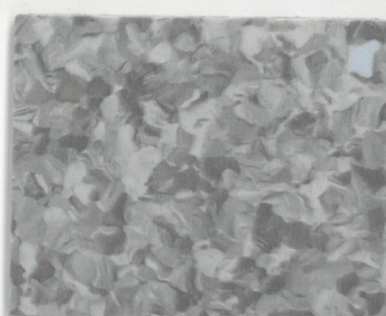

2076 Storm




2050 Midnight



Classic



2062 Beach

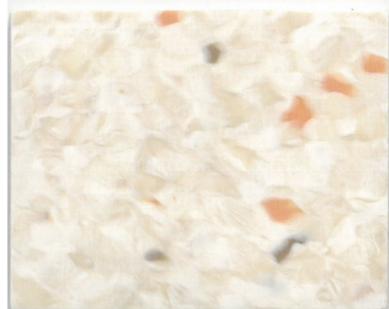

2084 Cream



2061 Sand




2077 Latte



2065 Bamboo



2064 Hunting

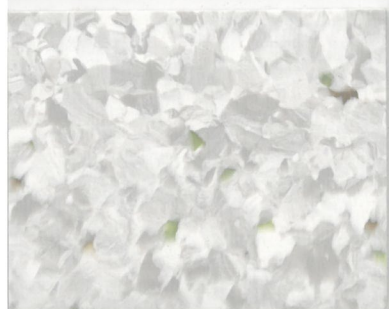


2058 Fog




2063 Emerald




2066 Forest

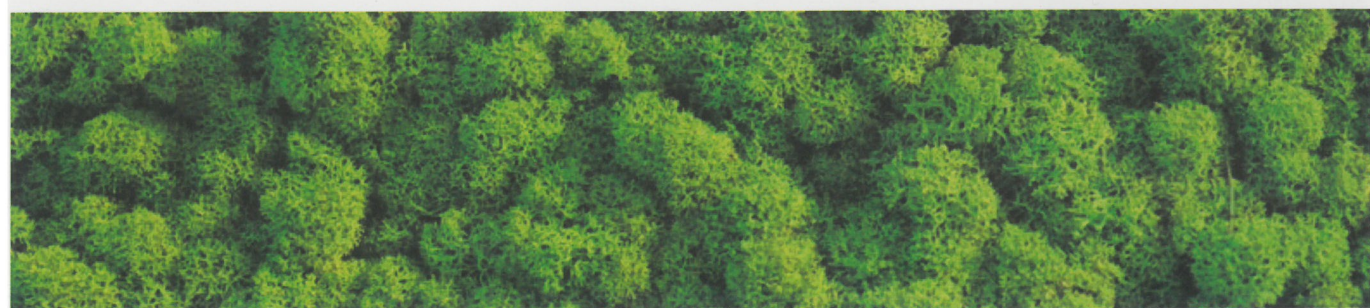


Classic

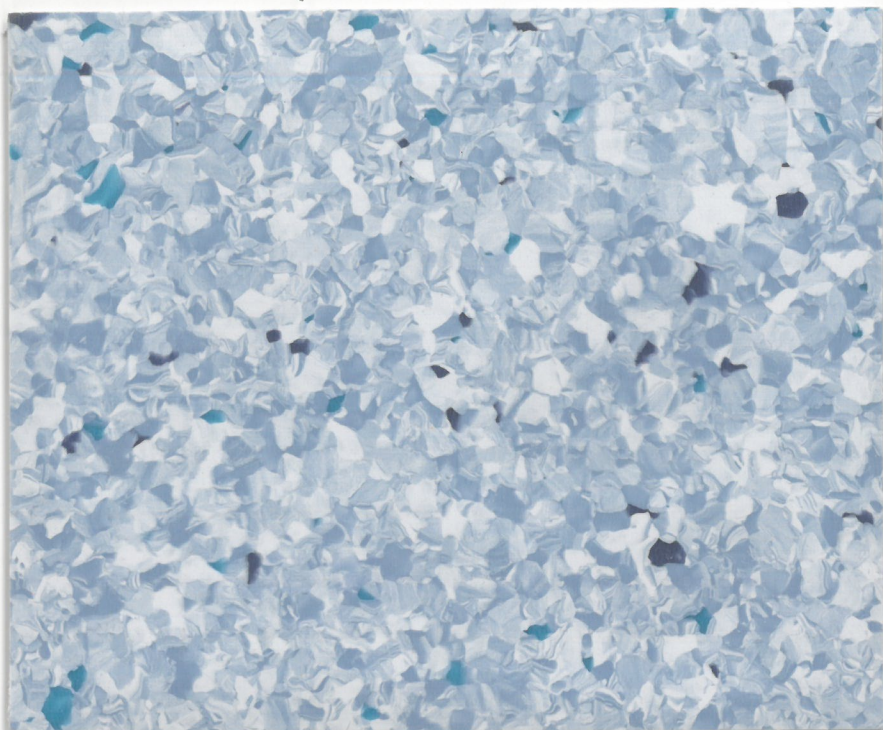


2070 Ink Blue

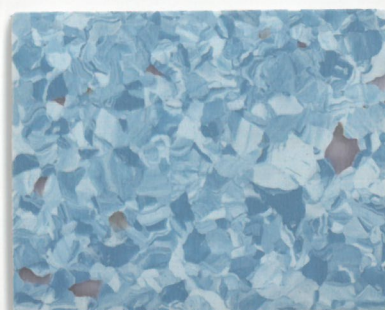

2069 Sky

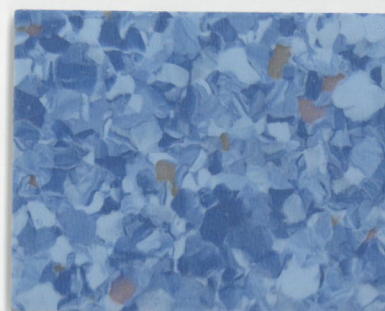


2081 Cobalt

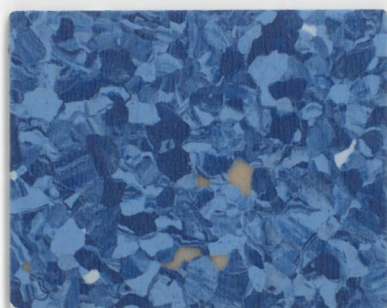

2067 Pool




2068 Sea Blue

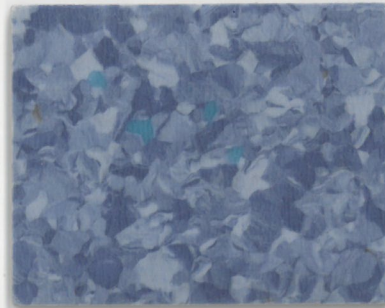

2082 Ocean



2083 Candy

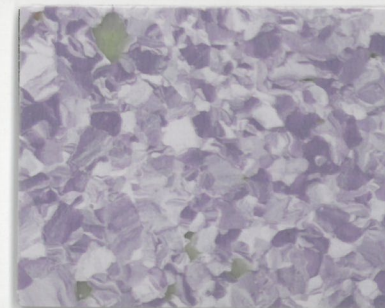


2075 Lavander



MIPOLAM® AMBIANCE ULTRA™


Trendy **NEW**

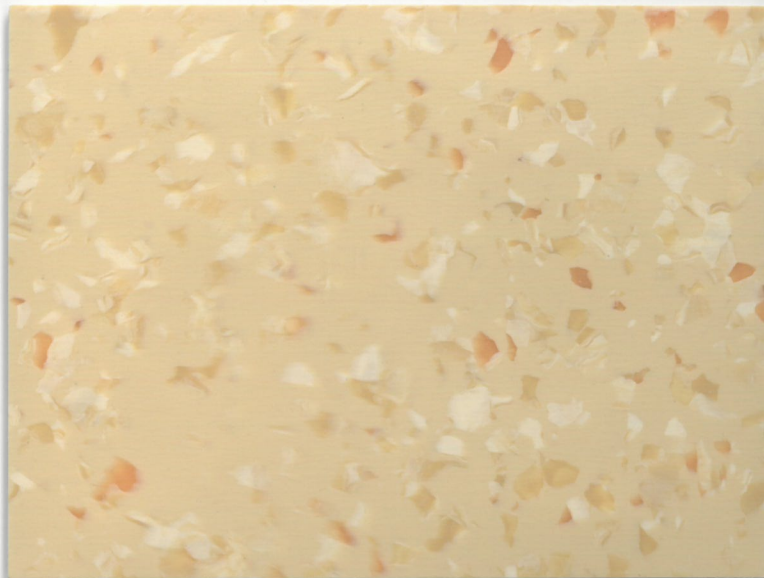

0048 Wheat



0043 Sandy Beige

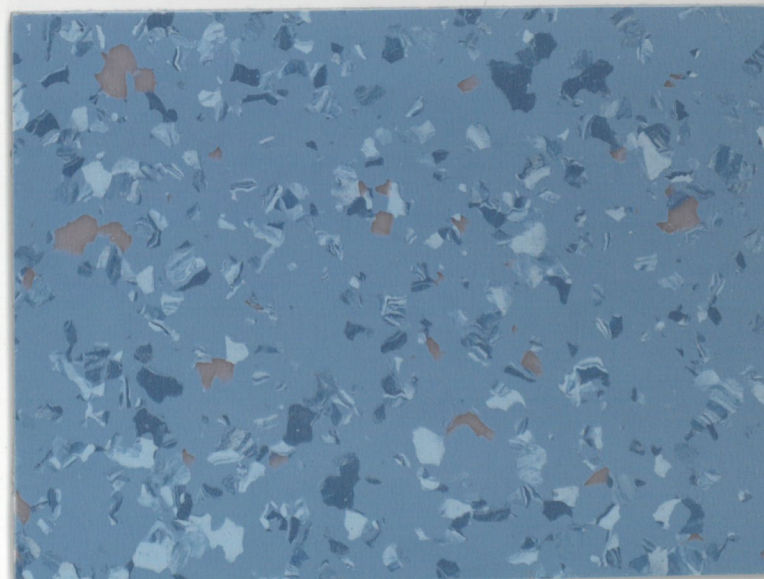

0044 Slate Blue

Trendy **NEW**



0046 Violet



0051 Orange



0052 Primrose




0056 Apricot




0049 Milky Coffee



0057 Honey

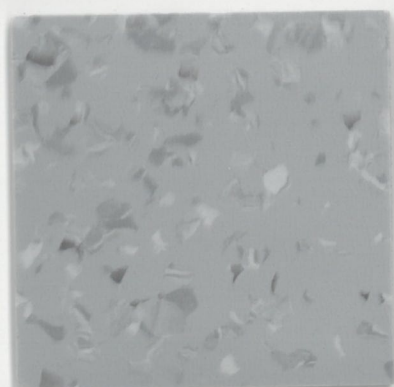

0053 Misty Grey

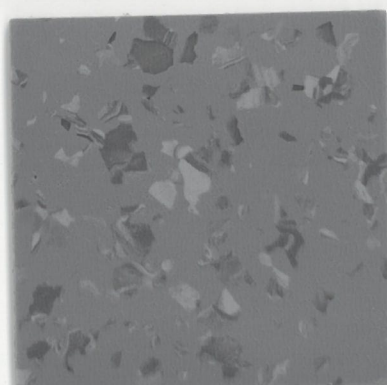


0055 Steel Grey




0054 Sienna



0050 Royal Blue

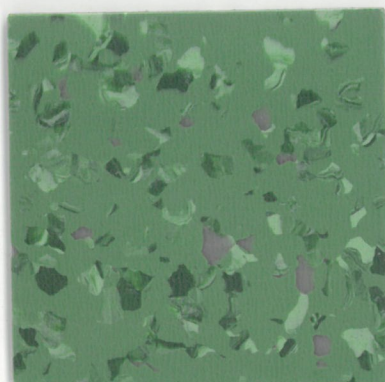

0047 Emerald Green

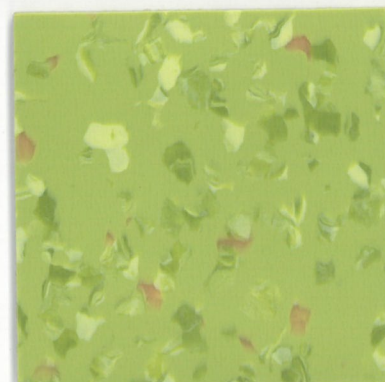

0045 Turquoise

FEWER VOC'S, BETTER INDOOR AIR QUALITY

INDOOR AIR QUALITY

- TVOC emissions 100 times better than norm requirements (TVOC < 10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatment Evercare™ to reduce drastically the use of chemical products and water and ensure the lowest environmental impact



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



RECYCLED CONTENT

- 100 % REACH compliant recycled content



WELLNESS

Health

- Antibacterial activity (inhibits growth > 99 %)

Comfort

- Walking comfort < 75 dB





MIPOLAM® AMBIANCE ULTRA™
Trendy

NEW



Soft and low
contrast design



Trendy design



Fresh colors



The perfect
choice for
architects

MIPOLAM® AMBIANCE ULTRA™

gerflor.com
gerflor.asia

Mipolam® Ambiance Ultra™ is a homogeneous pressed compacted floorcovering in sheet, with non-directional design, colour dyed as a raw mixture to ensure even color throughout the thickness and a matt finish. Its surface is densely compacted for improved wear and ease of maintenance.

It is treated with Evercare™, the latest improvement in polyurethane special maintenance treatment obtained by UV laser cross-linking. Evercare™ avoids staining of chemical products, like betadine, eosin, or anti-bacterial hand gel and increases the durability of the flooring. No wax for life!

Mipolam® Ambiance Ultra™ incorporates bacteriostatic and fungistatic actions. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for very heavy traffic areas.

Mipolam® Ambiance Ultra™ is available in a wide pallet of 50 classic and trendy colors.

MIPOLAM® AMBIANCE ULTRA™

DESCRIPTION			
Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m²	2750
Width of sheet	ISO 24341 (EN 426)	cm	200
Length of sheet	ISO 24341 (EN 426)	lm	20
CLASSIFICATION			
Norm / Product specification	-	-	ISO 10581 (EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	< 2
Electrical resistance	EN 1081	Ω	10 ⁹ - 10 ¹⁰
Slip resistance dry	EN 13893	-	≥ 0.3
Slip resistance wet	DIN 51130	class	R9
PERFORMANCES			
Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈ 0.03
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈ 0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	Evercare™
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	>99 % Inhibits growth
Color number	-	-	50
ENVIRONMENT / INDOOR AIR QUALITY			
TVOC after 28 days	ISO 16000-6	µg/m³	< 10
Certification	-	-	Floorscore™
CE MARKING			
CE	EN 14041	-	

(1) The implementation of an effective cleaning regime is the most important defence against infections.

Gerflor. Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

MIPOLAM® AMBIANCE ULTRA™, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100 % REACH compliant



**INDOOR
AIR QUALITY**
100 times lower than
norm requirements
(TVOC < 10 µg/m³ after 28 days)



**RECYCLED
CONTENT**
100 % REACH compliant
recycled content



RECYCLABILITY
100 %



LCA
Eco-designed according
to a product specific
life cycle analysis



WELLNESS
Walking comfort:
< 75 dB

บริษัท ไทยวัฒนาสารคดี จำกัด
Building Materials Store, Bangkok
02 374 2872, 02 377 1532, 02 377 3304
Showroom : Monday - Saturday 8am - 5pm

www.twspplus.com
E-mail: sale.twspplus@gmail.com
Line Official : @twspplus



Gerflor®
theflooringgroup

GERFLOR ASIA Tel.: + 86-21-63578818