

TARALAY® EMOTION™

gerflor.com
gerflor.asia




Gerflor®
theflooringgroup



34-43

PANAME / COUTURE / ROMA / ANGLE / TERRA / PYRAMID / WOOD

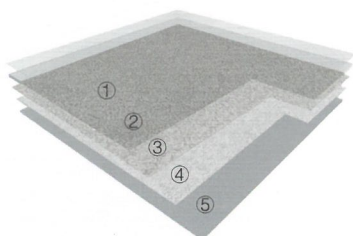

- ① Protecsol® surface treatment
- ② Transparent wear layer
- ③ Printed design
- ④ Reinforced layer
- ⑤ Compact back layer

- ☐ Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning.
- ☐ No DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, friendly to health and environment.
- ☐ Transparent wear layer with printed designing, highest durability.
- ☐ Recommended for high traffic area in education, office, retail, hospital and institutional buildings.
- ☐ Compact backing with reinforced layer, high resistance to static and dynamic indentation under rolling loads, and excellent dimensional stability.



Compact sheet, without foam backing

LOW VOC EMISSION, GOOD INDOOR AIR QUALITY



COMPOSITION

100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

Health

- Antibacterial activity (inhibits growth > 99%)

Safety

- Good slip resistance

Comfort

- Walking comfort



RECYCLED CONTENT

- 20 % recycled content
- 100 % REACH compliant recycled content



RECYCLABILITY

- 100 % recyclable product



INDOOR AIR QUALITY

- TVOC emissions 10 times lower than norm requirements (TVOC < 100 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



LCA

- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)
- Patented surface treatment Evercare™ to reduce drastically the use of chemical products and water and ensure the lowest environmental impact

TARALAY® EMOTION™



1154 Earth Nature - Terra

NEW



1125 Sand - Roma

NEW



1132 Sunshine - Couture



1122 Beige - Paname

NEW



1135 Sand - Angle

NEW




1131 Alabaster - Couture



0707 Natural - Couture




1101 Cream - Roma




1140 Earth - Angle

NEW

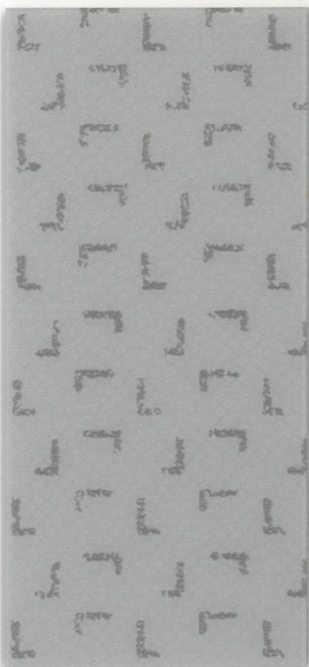

1137 Pumice - Angle

NEW

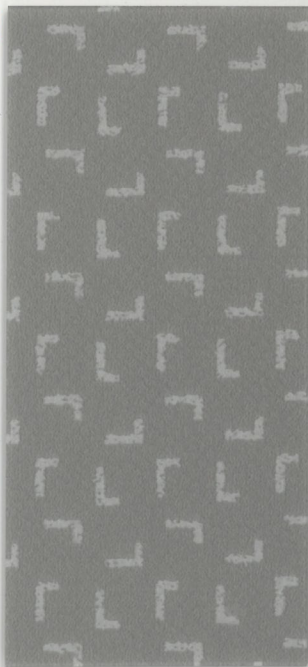

1143 Volcano - Angle


NEW



0711 Capuccino - Couture



0801 Sable - Paname



0809 Clay - Paname



0802 Light Grey - Paname

TARALAY® EMOTION™




NEW

1134 Maple - Angle



NEW

1127 Corn - Roma

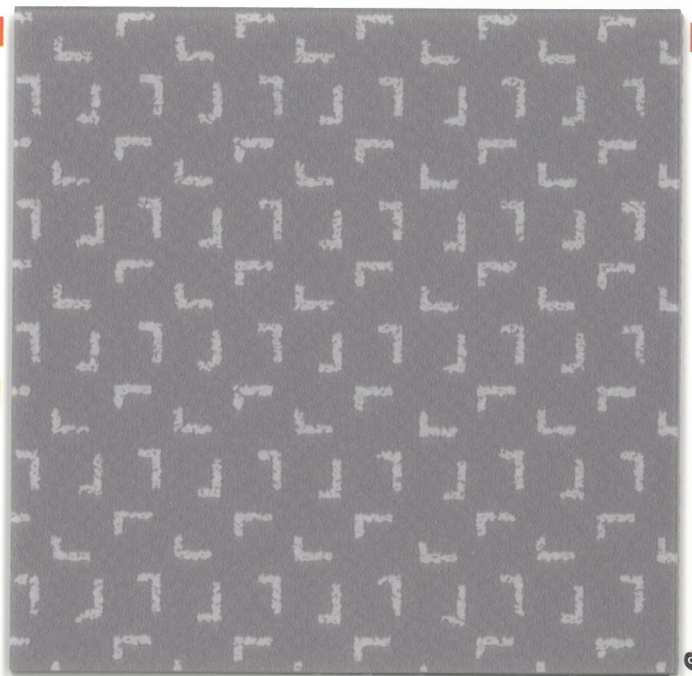

NEW

1141 Sugilite - Angle



NEW

1142 Sunset - Angle



NEW

1120 Yellow - Couture




NEW

1126 Orange - Roma




1105 Rouge - Roma



NEW

1146 Mahogany - Angle



NEW

1144 Forest - Angle



NEW

1136 Mountain - Angle




NEW

1118 Grass - Couture



1106 Spring - Roma




NEW

1128 Emerald - Roma

TARALAY® EMOTION™ WOOD



0504 Cream - Fontenay

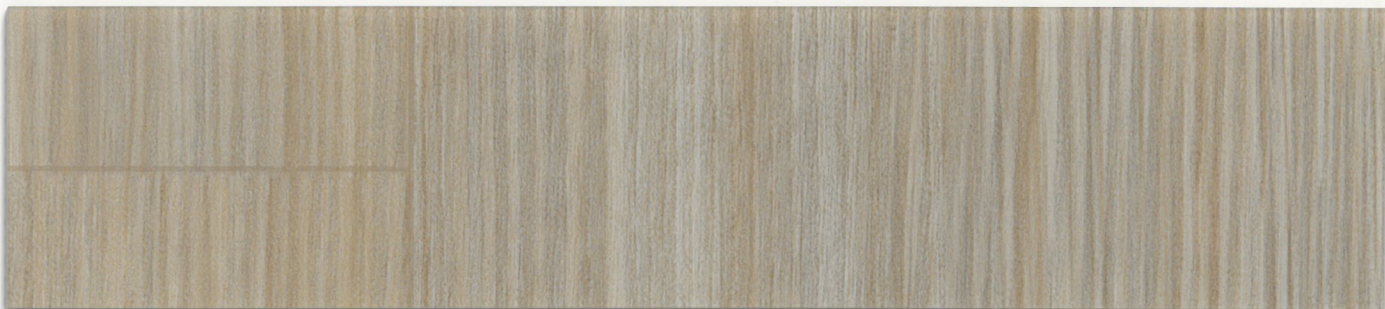


1152 Beige - Muse



1147 Light Beige - Albion



TARALAY® EMOTION™ WOOD

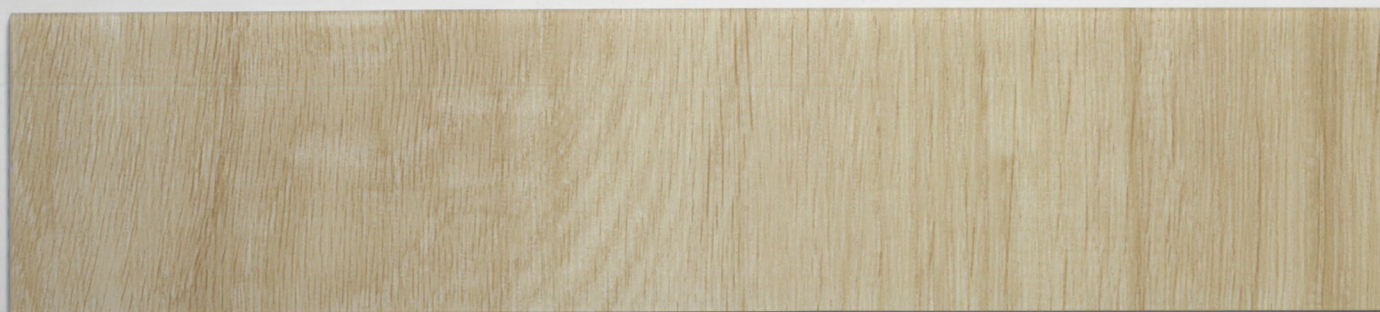

1148 Natural Yellow - Albion

NEW



20 cm




1116 Golden - Arcy

NEW



No plank
continuous
design

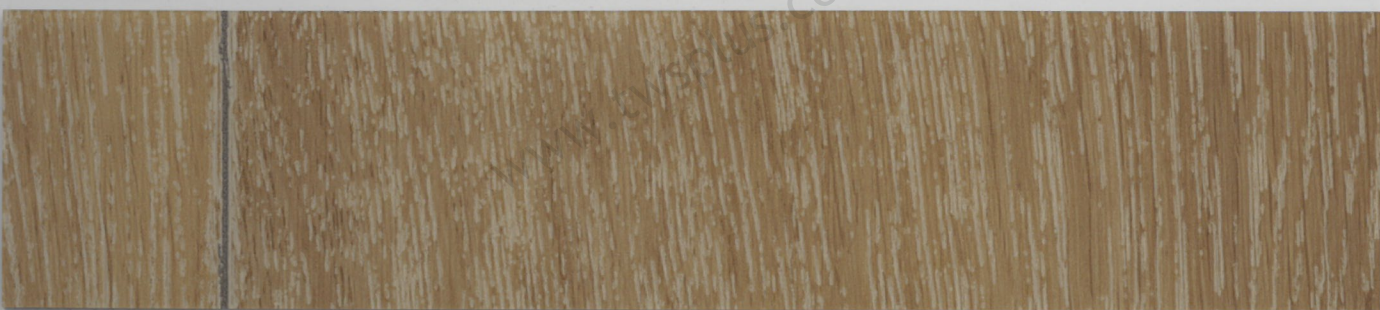

1115 Buckwheat - Amboise

NEW



16.6 cm



1003 Chamois - Arcy



No plank
continuous
design



0503 Honey - Fontenay



10 cm



TARALAY® EMOTION™ WOOD



0402 Light - Chinon



1150 Mid Brown - Albion

NEW



0902 Rustic - Amboise



0505 Brown - Fontenay



TARALAY® EMOTION™ WOOD



NEW



1149 Light Grey - Albion



NEW



0903 Beige - Amboise



NEW



1151 Deep Grey - Albion



NEW



1153 Brown Grey - Muse




NEW



1114 Dark Grey - Amboise

TARALAY® EMOTION™

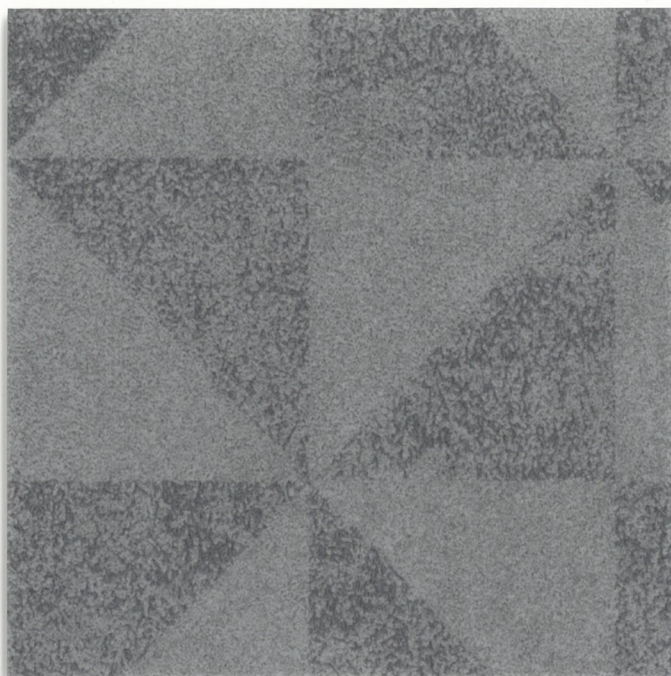


NEW

1158 Blue - Pyramid



NEW

1124 Sapphire - Paname




NEW

1159 Sky - Angle



NEW

1139 Mediterranean - Angle



NEW

1145 Carbon - Angle




NEW

1119 Ocean - Couture




NEW


1138 Aegean - Angle



1111 Ciel - Roma




0806 Anthracite - Paname



NEW

1130 Sapphire - Roma



1110 Ink - Roma




NEW

1121 Black - Paname



TARALAY® EMOTION™

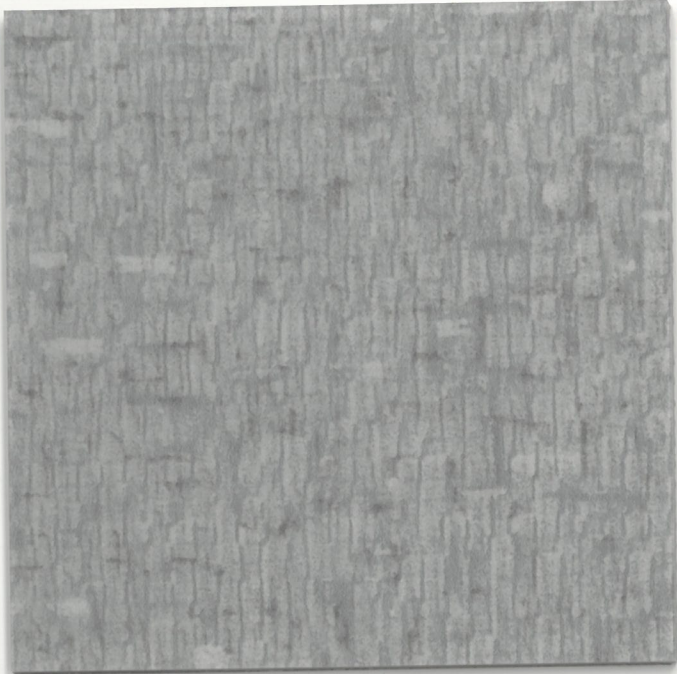

NEW

1117 Grey - Couture




NEW


1156 Beige - Pyramid




0804 Slate - Paname



0811 Calaité - Paname



1108 Painting - Roma




NEW

1155 Dark Grey - Terra




0712 Smoke - Couture



NEW

1129 Smoked - Roma



NEW

1157 Grey - Pyramid



0708 Dark - Couture



NEW

1123 Grey - Paname





INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

TARALAY® EMOTION™



TARALAY® EMOTION™ is a multilayered compact vinyl floor covering, available in 2m width sheet. The product comprises a printed design protected by a transparent wear layer, and the compact backing with reinforced layer resists static and dynamic perforation under rolling loads and provides excellent dimensional stability.

TARALAY® EMOTION™ is treated with Protecsol® surface treatment with excellent resistance to scratching, scuffing & easy cleaning. It has no DOP, no heavy-metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail, hospital and institutional buildings.

DESCRIPTION

	ISO 24346 [EN 428]	mm	2.0	2.6	2.0	2.6
Total thickness	ISO 24340 [EN 429]	mm	0.7	0.7	0.55	0.55
Wearlayer thickness	ISO 23997 [EN 430]	g/m ²	2800	3800	2900	4000
Weight	ISO 24341 [EN 426]	cm	200	200	200	200
Width of sheet	ISO 24341 [EN 426]	lm	20	15	20	15
Length of sheet						

CLASSIFICATION

Norm / Product specification	-	-	ISO 10582 [EN 649]	ISO 10582 [EN 649]	ISO 10582 [EN 649]	ISO 10582 [EN 649]
European classification	ISO 10874 [EN 685]	class	34-43	34-43	33-42	33-42
Fire rating	EN 13501 - 1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
Slip resistance wet	DIN 51 130	class	R9	R9	R9	R9

PERFORMANCES

Type binder content	ISO 10582	type	I	I	I	I
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0.4	≤ 0.4	≤ 0.4	≤ 0.4
Residual indentation	ISO 24343-1 [EN 433]	mm	≤ 0.1	≤ 0.1	≤ 0.1	≤ 0.1
Castor chair test	ISO 4918 [EN 425]	-	OK	OK	OK	OK
Thermal conductivity	ISO 10456 [EN 12524]	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical product resistance	ISO 26987 [EN 423]	-	OK	OK	OK	OK
Surface treatment	-	-	Protecsol®	Protecsol®	Protecsol®	Protecsol®
Anti-bacterial activity (E.coli - S.aureus - MRSA) (1)	JIS Z 2801	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Antiviral activity (human coronavirus 229E)	ISO 21702	-	99.7% after 5h	99.7% after 5h	99.7% after 5h	99.7% after 5h

ENVIRONMENT / INDOOR AIR QUALITY


TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 100	< 100	< 100	< 100
Certification	-	-	Floorscore®	Floorscore®	Floorscore®	Floorscore®

CE MARKING

CE	EN 14041	-	
----	----------	---	--

(1) The implementation of an effective cleaning regime is the most important defence against infections.

Gerflor. Don't forget our complementary ranges!

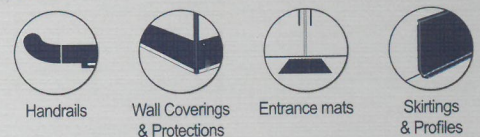

TARALAY® EMOTION™, ACTIONS SPEAK LOUDER THAN WORDS



COMPOSITION

100% REACH compliant



INDOOR AIR QUALITY

10 times lower than norm requirements (TVOC < 100 µg/m³ after 28 days)



RECYCLED CONTENT

20 %



RECYCLABILITY

100 %



LCA

Eco-designed according to a product specific life cycle analysis



WELLNESS

บริษัท ไทยวัฒนาสารเคมี จำกัด
Building Materials Store, Bangkok
02 374 2872, 02 377 1532, 02 377 3304
Showroom : Monday - Saturday 8am - 5pm

www.twspplus.com

E-mail: sale.twspplus@gmail.com

Line Official : @twspplus



Gerflor®
theflooringgroup