



The Original
MIPOLAM 1937

Mipolam Comet


Gerflor®

Mipolam Comet



MOQ = 1,280 ตรม./ ครั้ง

2623 Lovas

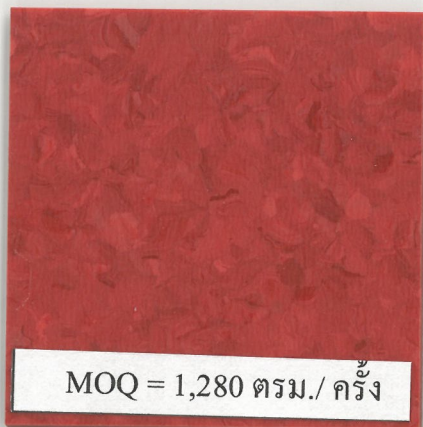


MOQ = 1,280 ตรม./ ครั้ง

2612 Read



2619 Ory

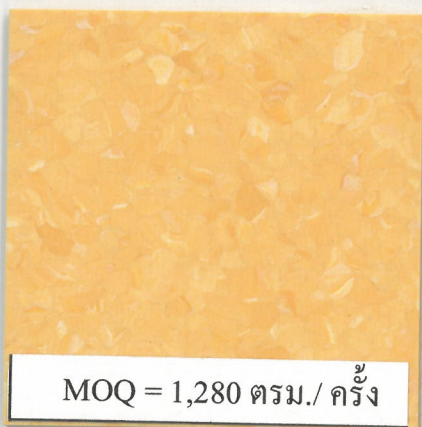

MOQ = 1,280 ตรม./ ครั้ง

2609 Lemmon



MOQ = 1,280 ตรม./ ครั้ง

2608 Hill



MOQ = 1,280 ตรม./ ครั้ง

2610 Neat






2600 Biela




2603 Cineos

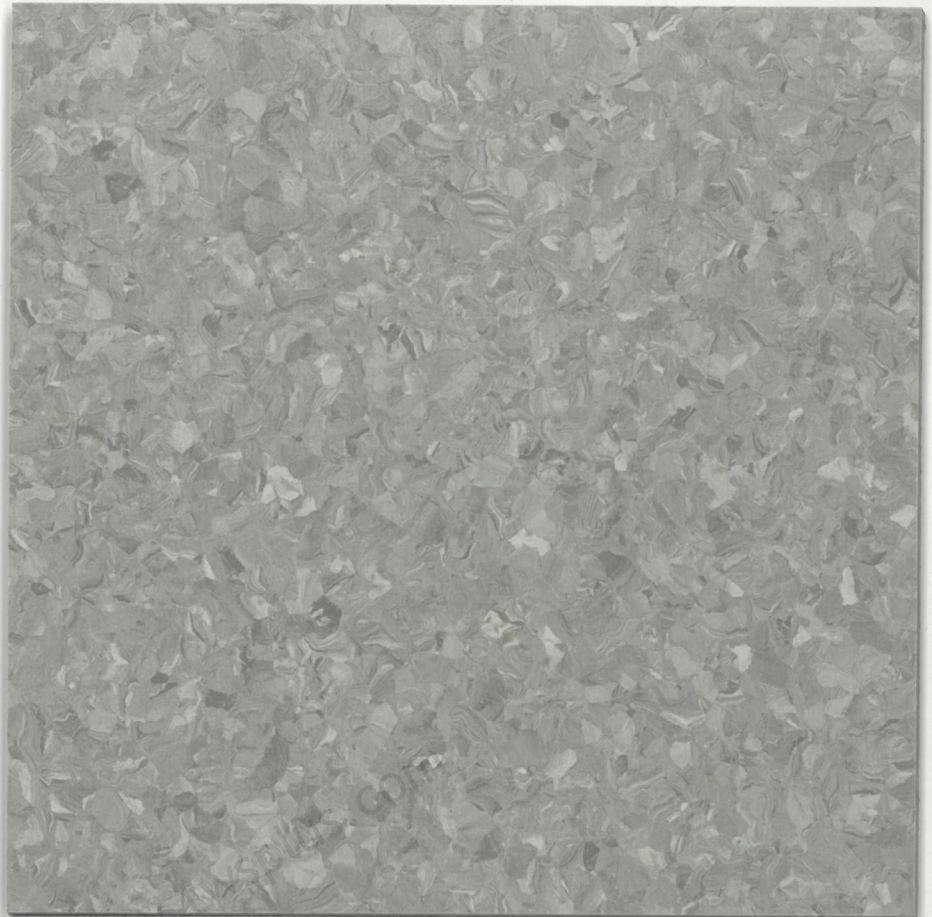

2601 Brooks



2616 Helin

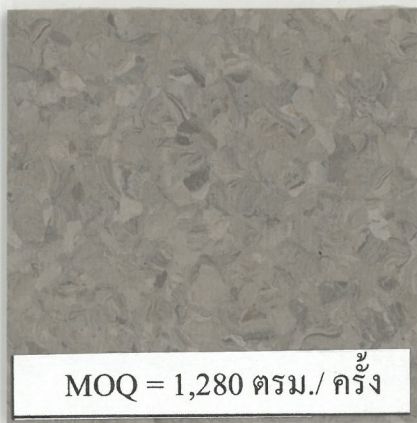

2615 Linear



2622 Wise

MOQ = 1,280 ตรม./ ครั้ง

Mipolam Comet




2613 Halley




2614 Larson



2618 Soho

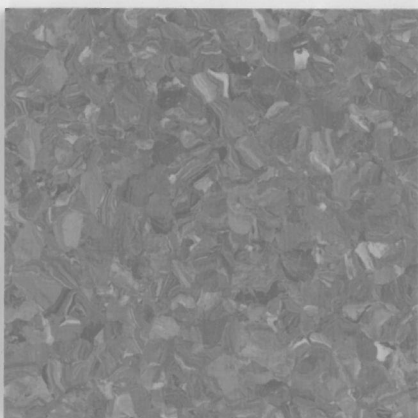

2604 Wolf

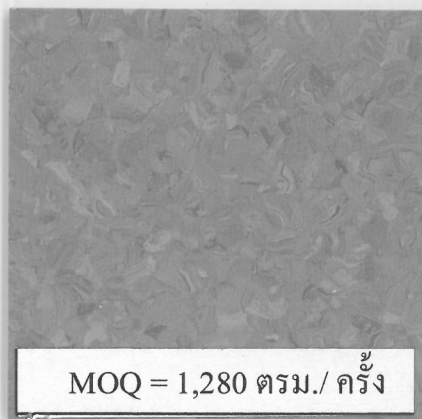

MOQ = 1,280 ตรม./ ครั้ง

2620 Panstarrs




2624 Tempel



MOQ = 1,280 ตรม./ ครง


2607 Spacewatch

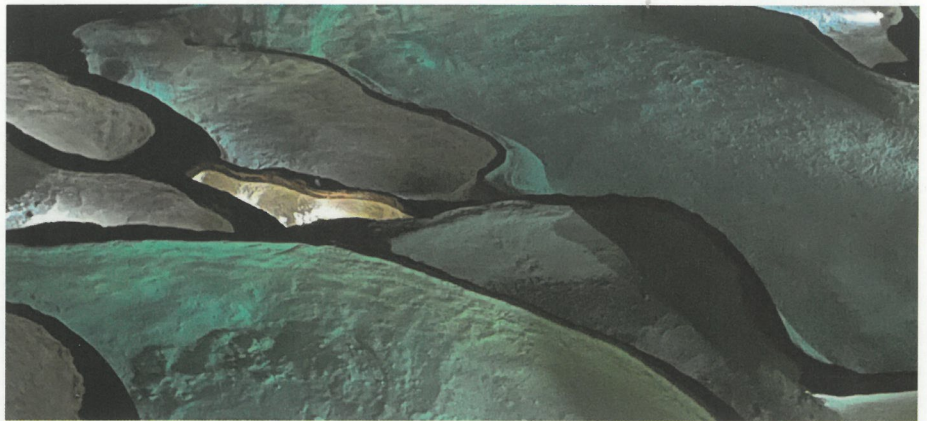

2606 Finlay




2617 Skiff

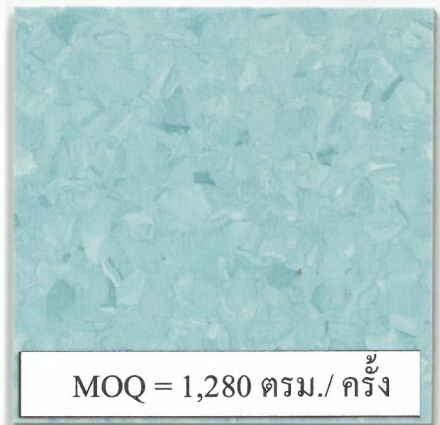


MOQ = 1,280 ตรม./ ครง

2611 Tritton

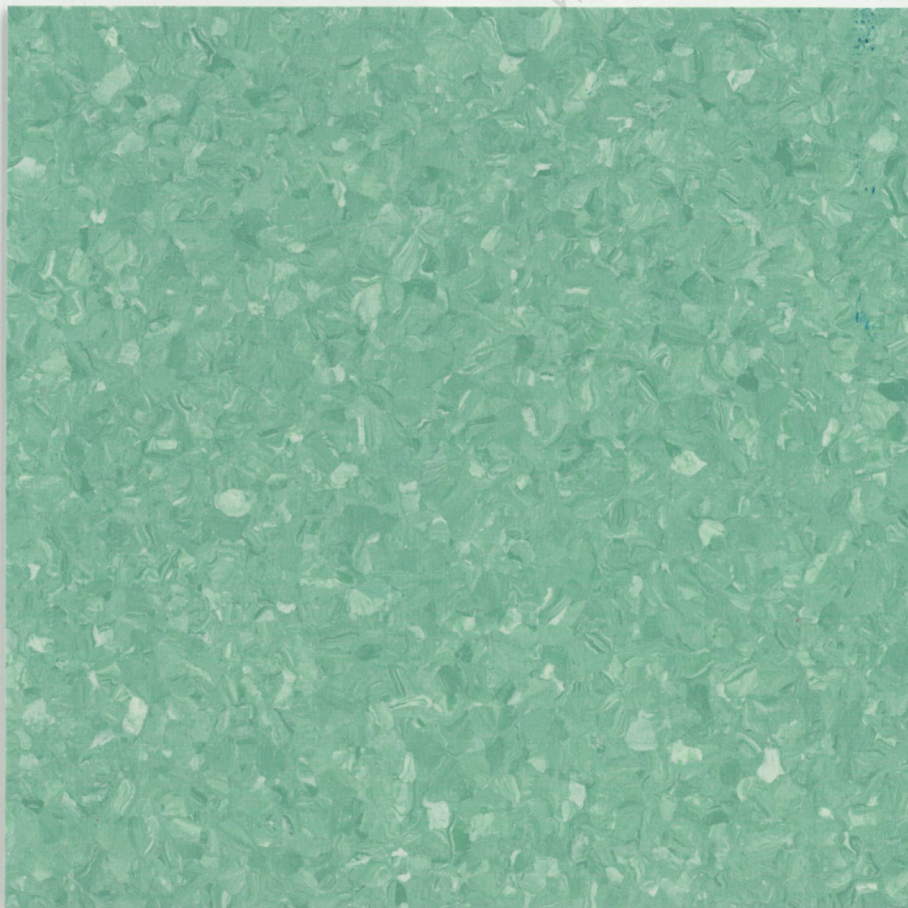

2625 Iras

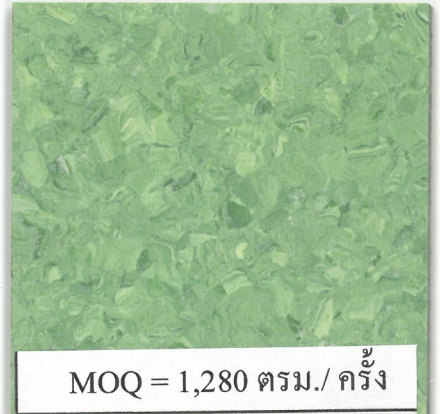

MOQ = 1,280 ตรม./ ครง

2605 Clark



MOQ = 1,280 ตรม./ ครง

2621 Wild

We care for the planet



Circularity

- 100% recyclable



Eco design

- 57% natural content
(Mineral + Recycled)

We care for the people



Health & Safety for users


- Anti-bacterial activity
- Phthalate-free



Indoor Air Quality

- TVOC <10 mg/m³ after 28 days:
100 times below standard
(ISO 16000-6)

we care / we act

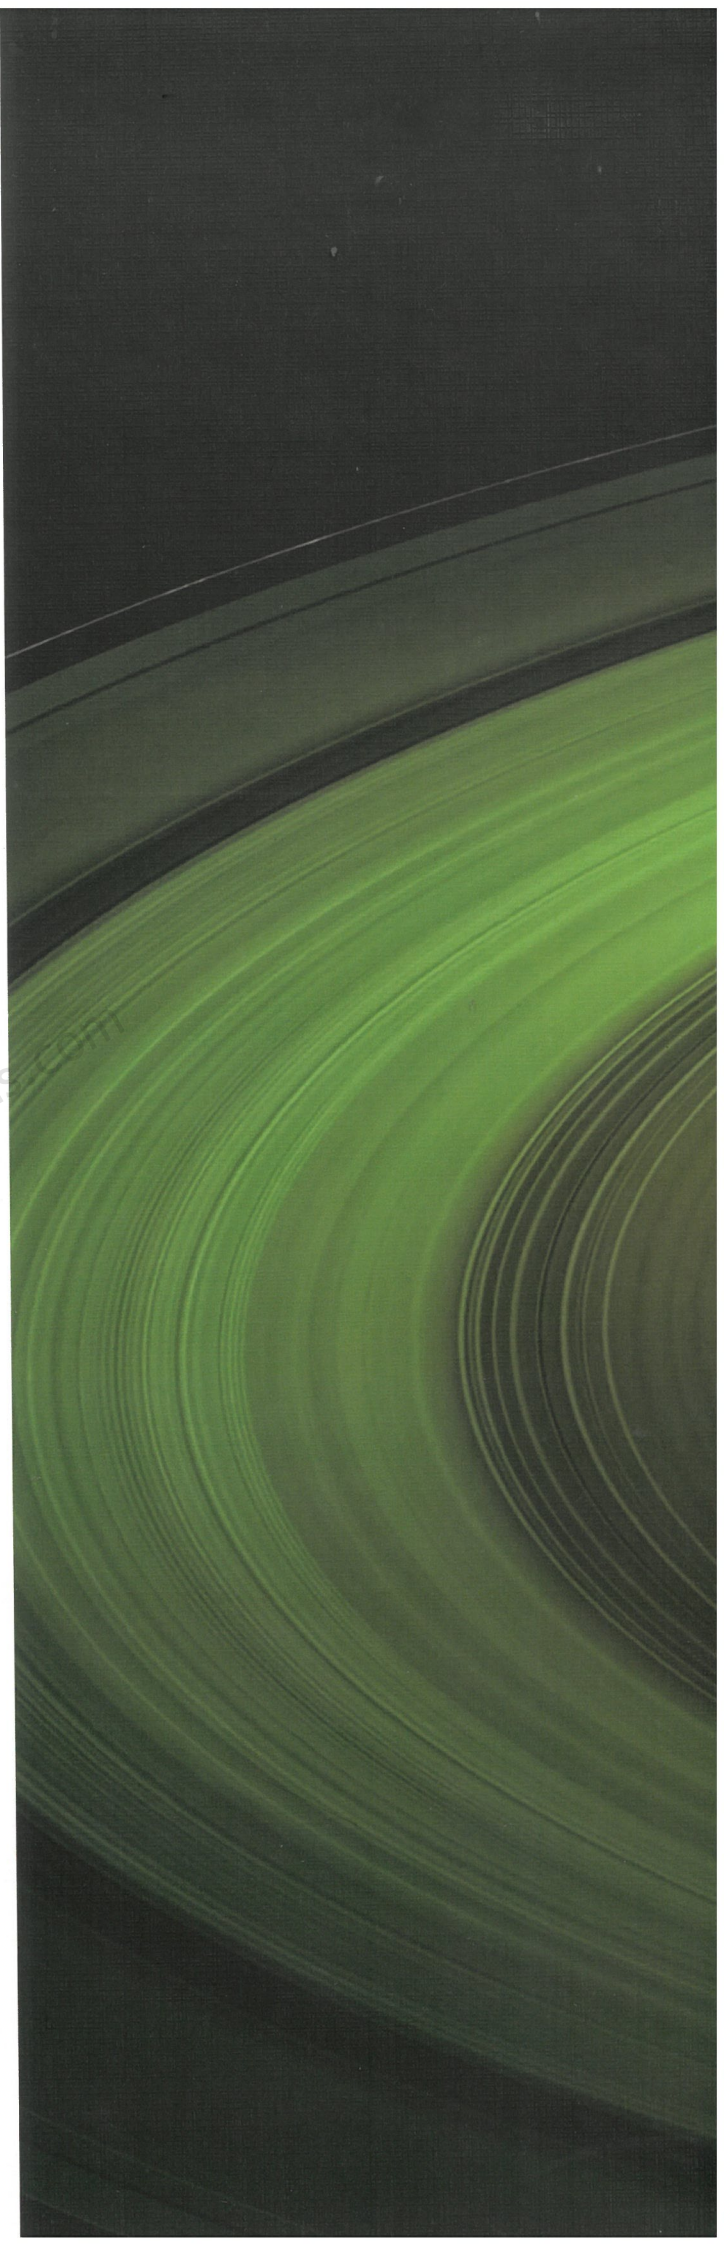

Mipolam Comet



Design & Harmony

- 26 colours
- Non directional Design with low contrast



Perfect finishing

- Color matching welding rods
- Coordinated with Gerflor wall coverings



Heavy traffic resistance

- Binder content Type I
- Class 34-43




Easy maintenance

- PUR+ surface treatment



Maximum hygiene

- Recommended with Gerflor Clean Corner System and entrance mats

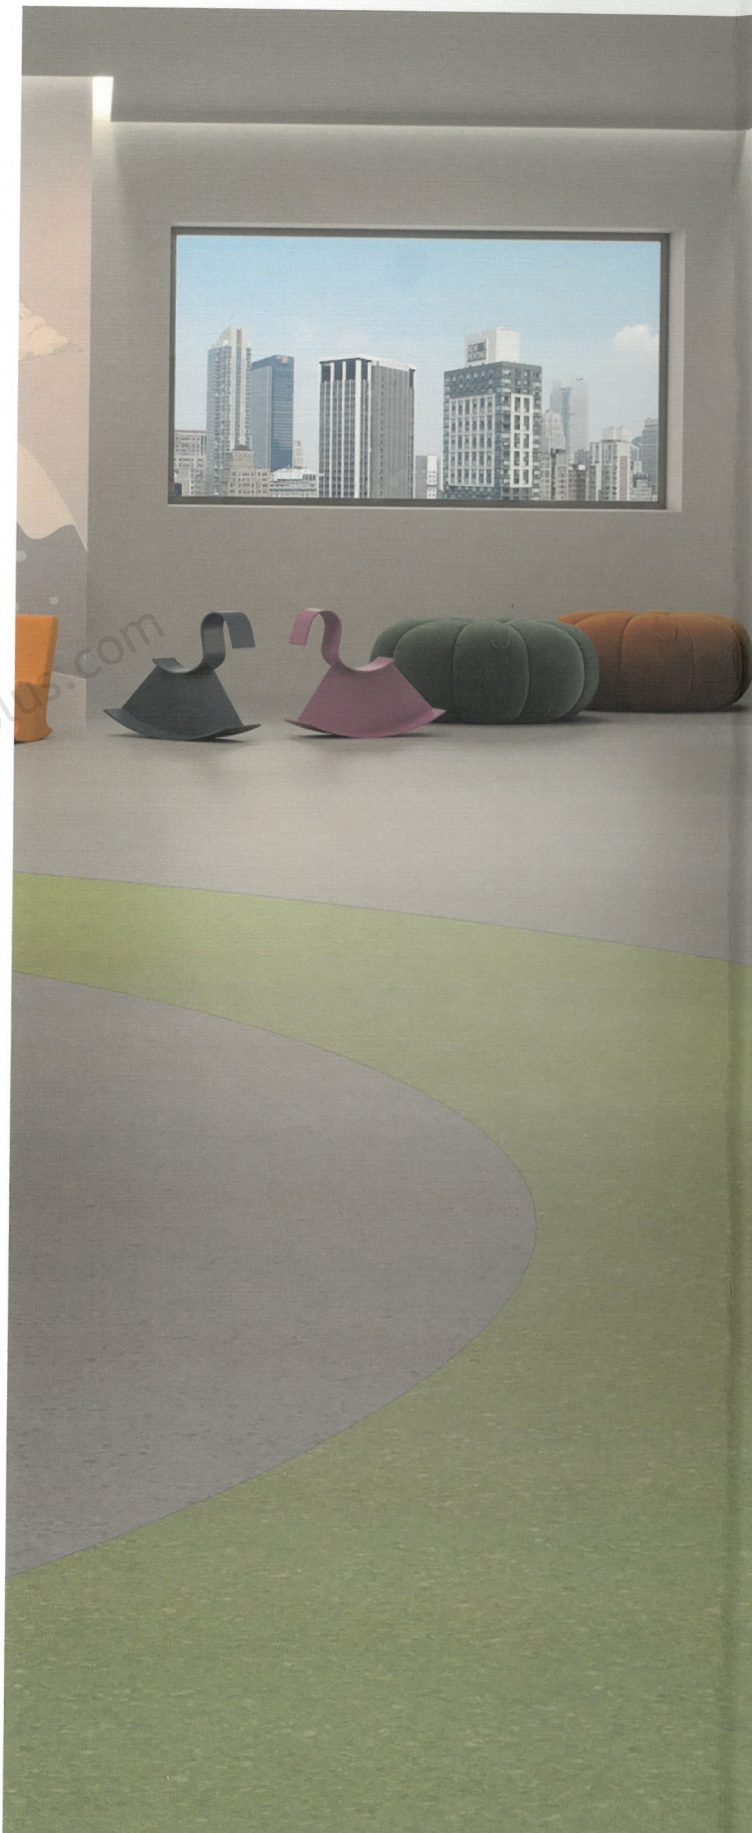

Mipolam Comet

บริษัท ไทยวัฒนาสมาคม จำกัด
Building Materials Store, Bangkok
02 374 2872, 02 377 1532, 02 377 3304
Showroom : Monday - Saturday 8am - 5pm

www.twspplus.com
E-mail: sale.twspplus@gmail.com
Line Official : @twspplus



Mipolam Comet

Description

Total thickness	EN ISO 24346	mm	2.00
Weight	EN ISO 23997	g/sq.m	2950
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	lm	20
		sq.m	40

Classification

Norm/product specification	-	-	EN ISO 10581
European classification	EN ISO 10874	class	34 - 43
Fire rating	EN 13501-1	class	Bfl-s1
	ASTM E648-08	class	Class I
Static electrical propensity	EN 1815	kV	< 2

Performances

Type binder content	EN ISO 10581	type	I
Dimensional stability	EN ISO 23999	%	≤ 0.40
Impact sound insulation	EN ISO 717-2	dB	5
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.K)	0.25
Colour fastness	EN 20 105 - BO2	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance ⁽¹⁾	EN ISO 26987	class	OK

Environment / Indoor Quality Air

TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
--------------------	-------------	--------------	------

CE marking



EN 14041



(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheets on gerflor.com

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.



Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/05/2023 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

We care / we act Our Commitments for a Sustainable future

CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025

BIO SOURCED CONTENT**
10 % by 2025

RECYCLED CONTENT
30 % by 2025

ADHESIVE FREE***
35 % by 2025

ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor®