
TARALAY® EMOTION

Heterogeneous Floorings



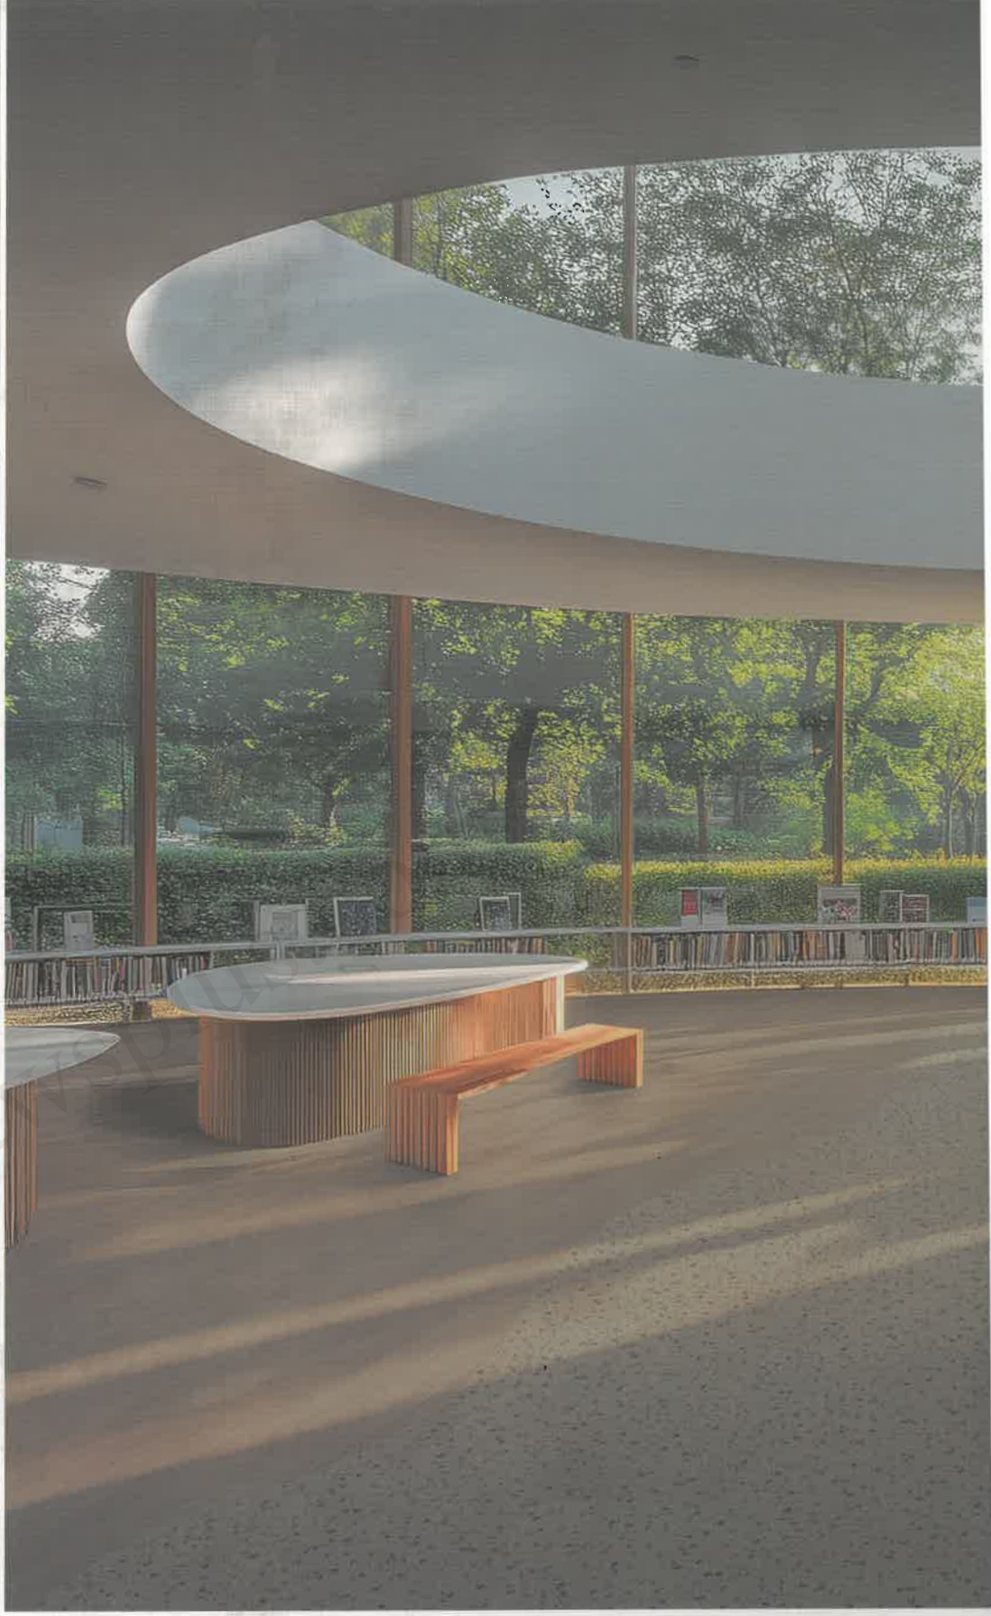

Gerflor®

Taralay® Emotion

A Decorative and Easy-maintenance Solution for High-traffic Area

Gerflor®

Taralay® Emotion



Design & Harmony
- 64 colours
- Harmony of color design in the collection and with Mipolam

Perfect finishing
- Color matching welding rods
- Coordinated with Gerflor wall coverings

Heavy traffic resistance
- From Class 33/42 to 34/43

Easy maintenance
- Protecsol with excellent resistance to scratchnig scuffing & easy cleaning

Maximum hygiene
- Recommanded with Gerflor Clean Corner System and entrance mats

www.twsplus.com

we **care** / we **act**

Circularity
- 100% recyclable

Health & Safety for users
- Anti-bacterial activity

Eco design
- 20% recycled content

Indoor Air Quality
- TVOC <100 µg/m³ after 28 days: 10 times below standard (ISO 16000-6)



Paname Green
Paname Slate



Blomma Light Brown



Kubes Beige



Fishbone Nature



Finesse Light Beige
Tarra Sand

www.floorcom




Siena Orange



Terra Dark Grey
Albion Light Beige



Blackbutt Honey
Rimini Cactus

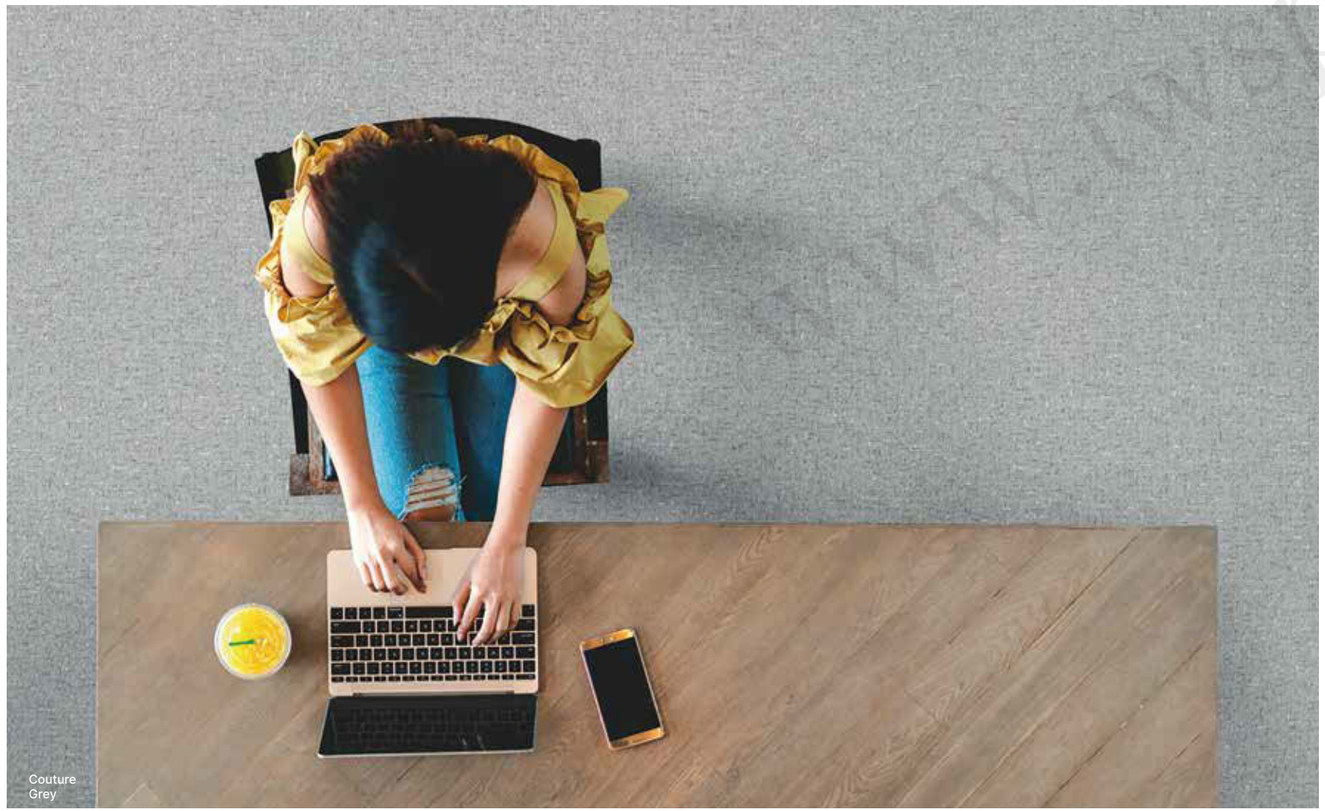

Couture
Grey



Paname Beige
Paname Clear

From floor to floor

Effortlessly combine our universes and products to create harmonious and beautifully coordinated spaces, enhancing the overall aesthetic and flow of your place (TL Emotion / Mipolam Ambiance / Mural Plus)









www.twsplus.com



PANAME
Green
1674



PANAME
Slate
0804



PANAME
Grey
1123



PANAME
Clear
1675



PANAME
Beige
1122



PANAME
Sable
0801



PANAME
Light Grey
0802



PANAME
Calaite
0811



PANAME
Sapphire
1124



PANAME
Clay
0809



PANAME
Anthracite
0806



TERRA
Tea Rose
1684



TERRA
White
1685



TERRA
Sand
1683



TERRA
Earth
Nature
1154



TERRA
Dark Grey
1155

www.swplus.com




SIENA
Nature
1681



SIENA
Sand
1682



SIENA
Orange
1680

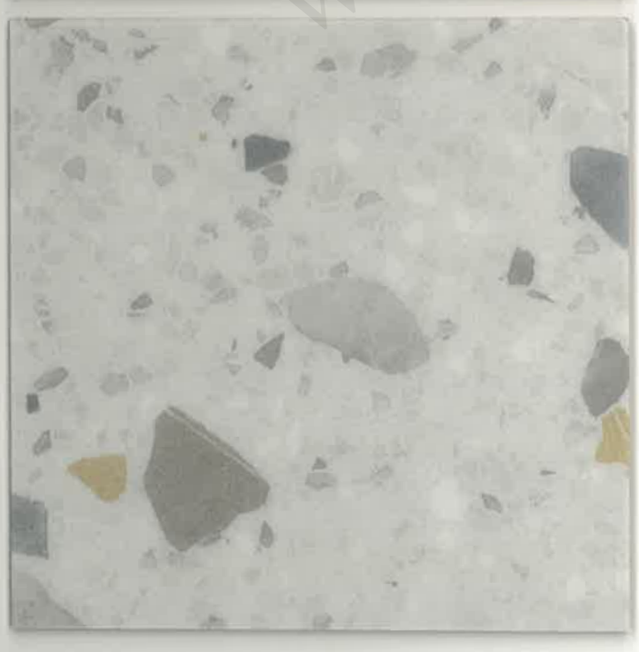

SIENA
Grey
1679



RIMINI
Cactus 1678



BLACKBUTT
Taupe 1646



RIMINI
Terracotta 1677



BLACKBUTT
Medium 1649



RIMINI
Golden Blue 1676



BLACKBUTT
Honey 1650

www.twsplus.com



LOUNGE
Beige
1670



LOUNGE
Taupe
1669



LOUNGE
Caramel
1671



LOUNGE
Nature
1672

LOUNGE
Clear
1673



BLACKBUTT 16.6cm
LOUNGE 16.6cm



ARCY
Grey
1645



ARCY
Golden
1116



FONTENAY
Brown
0505



FONTENAY
Honey
0503



FONTENAY
Cream
0504

www.twsplus.com



BLOMMA
Beige
1652



BLOMMA
Light Brown
1654



BLOMMA
Nature
1653



BLOMMA
Clear
1655



FISHBONE
Nature
1651



FONTENAY 10cm
BLOMMA 16.6cm
FISHBONE 10cm



ALBION
Light Beige
1165



ALBION
Mid Brown
1162



ALBION
Dark Brown
1643



ALBION
Golden
1644



ALBION
Natural Yellow
1161



ALBION 16.6cm


www.tilesplus.com



COUTURE
Beige
1657



ANGLE
Earth
1140

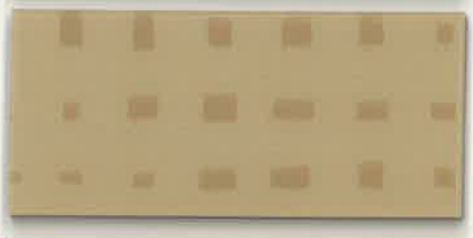

KUBES
Beige
1666



KUBES
Sun
1668



COUTURE
Natural
0707



COUTURE
Sauge
1164



ANGLE
Pumice
1137



ANGLE
Volcano
1143



COUTURE
Smoke
0712




COUTURE
Terracotta
1163




ANGLE
Sand
1135



FINESSE
Light Beige
1663

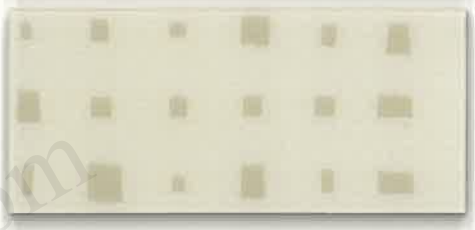

KUBES
White
1667

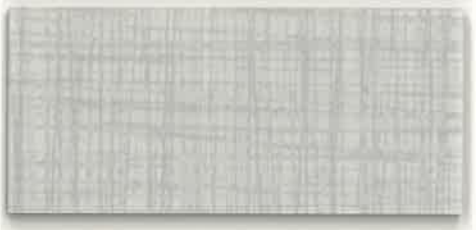


FINESSE
Light Grey
1659



KUBES
Grey
1664



COUTURE
Grey
1117

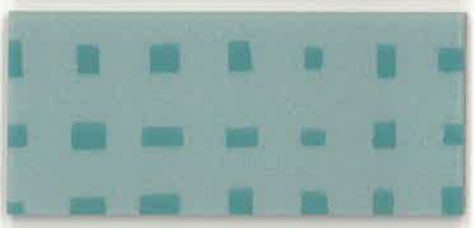

KUBES
Sky
1665



COUTURE
Ocean
1119

www.twsplus.com

Taralay® Emotion

gerflor.asia

			Taralay® Emotion		
Description					to access the latest technical data
Total thickness	ISO 24346 (EN 428)	mm	2.0	2.6	2.0
Wearlayer thickness	ISO 24340 (EN 429)	mm	0.7	0.7	0.55
Weight	ISO 23997 (EN 430)	g/m²	2800	3800	2900
Width of sheet	ISO 24341 (EN 426)	cm	200	200	200
Length of sheet	ISO 24341 (EN 426)	lm	20	15	20
Classification					
Norm / Product specification	-	-	ISO 10582 (EN 649)	ISO 10582 (EN 649)	ISO 10582 (EN 649)
European classification	ISO 10874 (EN 685)	class	34-43	34-43	33-42
Fire rating	EN 13501 - 1	class	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	≤ 2	≤ 2	≤ 2
Slip resistance wet	DIN EN 16165	class	R9(1)	R9(1)	R9(1)
Performance					
Type binder content	ISO 10582	type	I	I	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4	≤ 0.4	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≤ 0.1	≤ 0.1	≤ 0.1
Castor chair test	ISO 4918 (EN 425)	-	OK	OK	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.k)	0.25	0.25	0.25
Colour fastness	ISO 105 - B02	degree	≥ 6	≥ 6	≥ 6
Chemical product resistance	ISO 26987 (EN 423)	-	OK	OK	OK
Surface treatment	-	-	Protecsol®	Protecsol®	Protecsol®
Anti-bacterial activity (E.coli - S.aureus) (2)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth
Antiviral activity (human coronavirus 229E)	ISO 21702	-	99.7% after 5h	99.7% after 5h	99.7% after 5h
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000 - 6	µg/m³	< 100	< 100	< 100
Certification	-	-	Floorscore®	Floorscore®	Floorscore®
CE Marking					

CE EN 14041 DS Bfl-s1

(1) R10 customization available for part of the colors upon MOQ
(2) The implementation of an effective cleaning regime is the most important defence against infections.

TARALAY® EMOTION is a heterogeneous compact vinyl floor covering, available in 2m width sheet. The product comprises a printed design protected by a transparent wear layer, and a compact backing, which resists static loading and dynamic indentation under rolling loads and provides excellent dimensional stability.
TARALAY® EMOTION is treated with **Protecsol®** surface treatment with excellent resistance to scratching, scuffing & easy cleaning. It has no DOP, no heavy metal, no benzene, no formaldehyde & 100% compliant with REACH, which is friendly to health and environment, recommended for high traffic area in education, office, retail, hospital and institutional buildings.
The product TVOC is < 100 µg/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 02/06/2025 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

we care / we act

our commitments for **2030**

climate
-30% CO_2
scopes 1,2,3 in tons CO_2, vs 2019
Science Based Targets(1)

resources
75%
biobased, mineral & recycled(2)
30%
recycled content(3)

circularity
65,000
tons of waste treated(4)
45%
looselay(5)

health & well-being
100%
outperforming Indoor Air Quality standards(6)
95%
sales covered by EPDs(7)

people
Towards 0
accident(8)
30%
women(9)
40%
internal mobility(10)

GERFLOR ASIA Tel.: + 86-21-63578818

Gerflor®

More details: 1.Scopes 1,2&3 , in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2.Origin of raw materials for the entire Floor & Wall portfolio, on average, by weight; including 15% virgin salt, a primary element in vinyl manufacturing. Compared to 70% in 2024. 3.Average content in the Floor & Wall vinyl portfolio, by weight. Compared to 21% in 2024. 4.Recycled in our factories and recycling units. Compared to 56,600 tons in 2024. 5.% of Floor activity with non-glued products, easy to remove, easy to reuse. Compared to 40% in 2024. 6.100% of vinyl and linoleum sold to the building market below 100 micrograms /m³ (TVOC 28 days). 7.% of Floor & Wall activity covered by Environmental Product Declarations. Compared to 43% in 2024. 8.Towards 0 accident : Lost Time Injury Frequency Rate(LTIFR) below 3 vs. 8,9 in 2024, for Gerflor employees worldwide. 9.30% women in our global workforce and among our managers. Compared to 26% in 2024. 10.% job openings filled with internal hires worldwide. Compared to 36% in 2024 (France).

www.twsplus.com

EN25062507 for English Version - Indicative documentation cost USD 8.5