



MIPOLAM® 150



gerflor.com
gerflor.asia



NEW

Gerflor®
theflooringgroup

MIPOLAM® 150



Performances and benefits



Excellent abrasion resistance



Matt finish surface, enhanced design & colour



Available in 2 m sheet



Homogeneous vinyl flooring suitable for medium to heavy duty traffic areas



Flexible flooring, easy to install & weld



Directional design available in 22 references

FEWER VOC'S, BETTER INDOOR AIR QUALITY



COMPOSITION 100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



WELLNESS

- Health
- Antibacterial activity (inhibits growth > 99 %)



INDOOR AIR QUALITY

- TVOC emissions 100 times lower than norm requirements (TVOC <10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



RECYCLABILITY

- 100 % recyclable product



RECYCLED CONTENT

- 100 % REACH compliant recycled content

INSTALLATION

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

MAINTENANCE

No wax is needed right after installation. Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

Rubber leaves indelible stains on vinyl flooring; do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.



2091



1014



2038



1010




2049



1013



1007

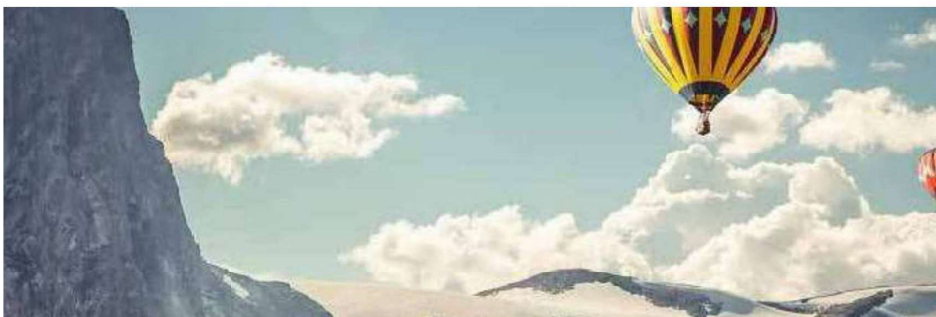

 Compact sheet, without foam backing

MIPOLAM® 150

PUR PROTECT

gerflor.com
gerflor.asia

MIPOLAM® 150

DESCRIPTION

Total thickness	ISO 24346 [EN 428]	mm	1,5*	2
Weight	ISO 23997 [EN 430]	g/m ²	2500	3300
Width / Length of sheet	ISO 24341 [EN 426]	cm / lm	200 / 20	

CLASSIFICATION

Norm / Product specification	-	-	ISO 10581 [EN 649]	
European classification	ISO 10874 [EN 685]	class	23 - 31 / 34 - 43	
Fire rating	EN 13 501-1	class	Bfl-s1	
Static electrical propensity	EN 1815	KV	<2	
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰	
Slip resistance dry	EN 13893	-	≥0,3	
Slip resistance wet	DIN 51130	class	R9	

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤7,5	
Wear group	EN 649	group	M	
Type binder content	ISO 10581	type	II	
Dimensional stability	ISO 23999 [EN 434]	%	≤ 0,4	
Residual indentation	ISO 24343-1 [EN 433]	mm	=0,05	
Castor chair test	ISO 4918 [EN 425]	-	OK	
Thermal conductivity	ISO 10456 [EN 12524]	W/(m.K)	=0,25	
Colour fastness	ISO 105 - B02	degree	≥ 6	
Chemical products resistance	ISO 26987 [EN 423]	-	OK	
Anti-bacterial and fungicidal treatment	-	-	OK	
Surface treatment	-	-	PUR Protect	
Color number	-	-	22	

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m ³	< 10	
Certification	-	-	Floorscore®	

CE MARKING

CE	EN 14041	-		
----	----------	---	---	--

* Special order, minimum quantities needed

MIPOLAM® 150 is a durable, high performing flexible homogeneous multipurpose flooring suitable for most types of heavy traffic areas. It benefits from PUR Protect surface treatment with excellent cleaning characteristics, improved resistance to scratching and scuffing. MIPOLAM® 150 is recommended for public, institutional and commercial buildings where ease of maintenance and long life under heavy traffic are required.

Gerflor Don't forget our complementary ranges!



MIPOLAM® 150, LESS SPEAKING FOR MORE ACTIONS

 COMPOSITION 100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent	 RECYCLID CONTENT 25% average recycled content 100% REACH compliant recycled content	 RECYCLABILITY 100% recyclable product	 INDOOR AIR QUALITY TVOC emissions between 10 and 100 times better than norms requirements Floorscore certified No formaldehyde emission	 INSTALLATION Innovative adhesive free installation systems	 WELLNESS Health: Antibacterial activity (inhibits growth > 99%)
--	---	--	--	--	--

บริษัท ไทยวัฒนาสมาคม จำกัด
 Building Materials Store, Bangkok
 02 374 2872, 02 377 1532, 02 377 3304
 Showroom : Monday - Saturday 8am - 5pm

www.twsplus.com
 E-mail: sale.twsplus@gmail.com
 Line Official : @twsplus



Gerflor®
 theflooringgroup
 GERFLOR ASIA Tel.: + 86-21-63578818

FEB 2018-02-01 Version - Indicative documentation cost USD 3
 Gerflor has a policy of continuous product improvement. It reserves the right to change design and specifications without notice.